


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		ADDED SPACER C3-8-31.	10/10/2012	RJC	DW
1A	14-0111	CH'D TITLE BLOCK WAS RED BARN IS DART. ADDED ENGRAVE NOTE. ADDED NOTE $\triangle$ 1.	8/7/2014	DJN	RW
2	14-0195	C3-8-2-1 CH'D DIM WAS LIMITS $\varnothing.0933-.0937$ IS LIMITS $\varnothing.094-.097$. ADDED "[CLOCKWISE]" TO NOTE $\triangle$ 3. CH'D NOTE 4 WAS PLACE BUSHING AND PIN IN PLACE AS SHOWN AFTER DRILLING IS INSTALL SPACER AND PIN IN PLACE AS SHOWN ON SHEET 1 AFTER DRILLING. ADDED ENGRAVE BATCH NUMBER NOTE. C3-8-3-1 CH'D DIM WAS $\varnothing2.285$ IS $\varnothing1.95$. CH'D TOLERANCE ON NON-CRITICAL DIMENSIONS.	10/23/2014	DPD	JAG
3	15-0243	UPDATED TO NEW DRAFTING STANDARDS. C3-8-3-2 DELETED; REPLACED WITH 32446 .	8/25/2015	DPD	JAG

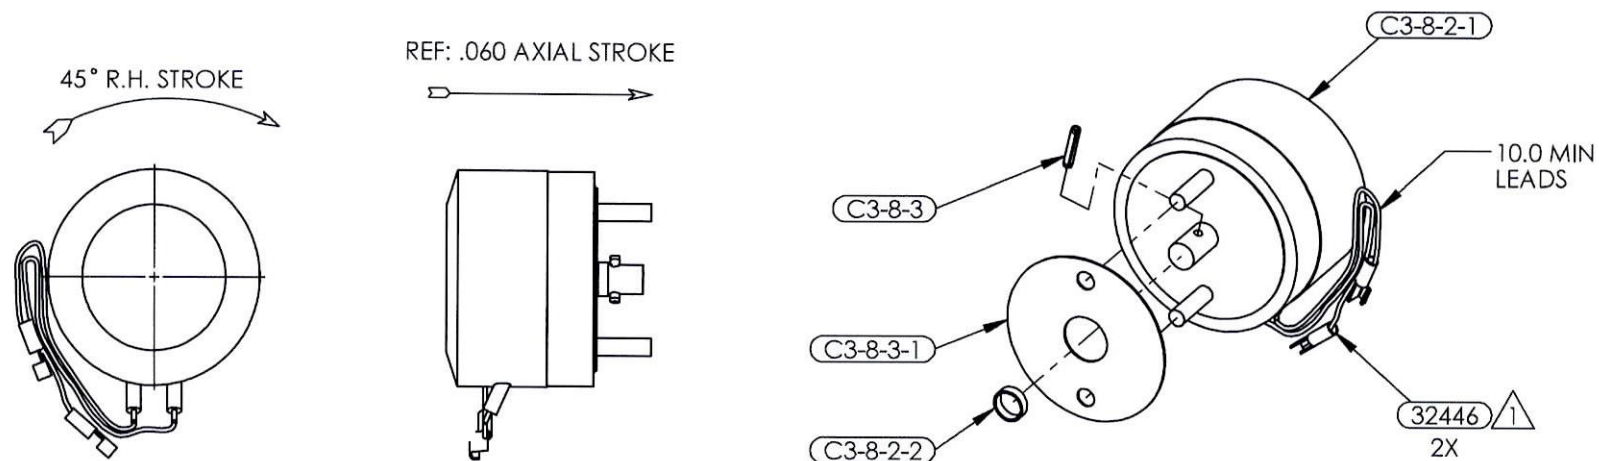

SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE
WORK ORDER

179125 MLC
18-06-14

NOTE:

$\triangle$ 1 CONNECTIONS SUPPLIED LOOSE.

DART AEROSPACE	
TITLE SOLENOID ASSEMBLY	
DWG NO. C3-8-2	REV 3
MAT'L UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX $\pm$.005 FRACTIONS $\pm$ 1/8 .XX $\pm$.01 ANGLES $\pm$ 5° .X $\pm$.1 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING	
DRAWN BY: CANAM APPROVED: <i>D Weil</i> HEAT TREAT FINISH SPEC USED ON MODEL	
SCALE 1:2	DATE 12/19/2001
SHEET 1 OF 4	

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
		B/O	C3-8-2-1	1	SOLENOID		TESTCO #152951-001	1,2
			C3-8-2-2	1	SOLENOID PIN SPACER	303 S.S.		3
		B/O	C3-8-3	1	SPRING PIN	18-8 S.S.	$\varnothing3/32$ X 1/2 (MCMASTER-CARR #92373A143)	1
		B/O	C3-8-3-1	1	SPACER	PETG		4
		B/O	32446	2	22-16 AWG KNIFE CONNECTOR		(ALLIED ELECTRONICS 32446)	1